

Cryogenic Valves

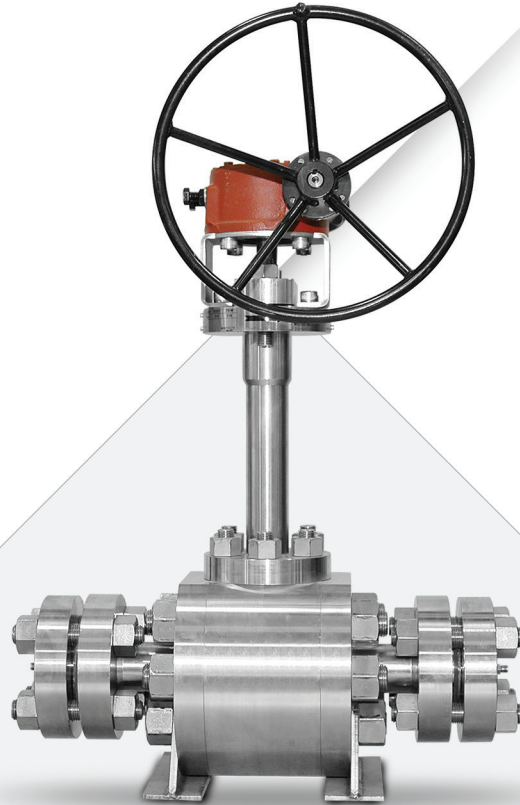

Cryogenic Service Applications


Valves are used with cryogenics from production through transportation and storage which serve many industries with gases such as oxygen, nitrogen, argon and more.

At extremely low temperatures of cryogenic liquids, many common materials become brittle and can crack. Many materials also shrink, causing potentially leaks at connections.

Therefore, care must be taken when designing equipment and selecting materials to be used with cryogenics.

Moisture must not be allowed to contaminate the valve as it will freeze and expand and cause leakage and abrasive damage to the equipment.

Some of the common gases used are listed below.

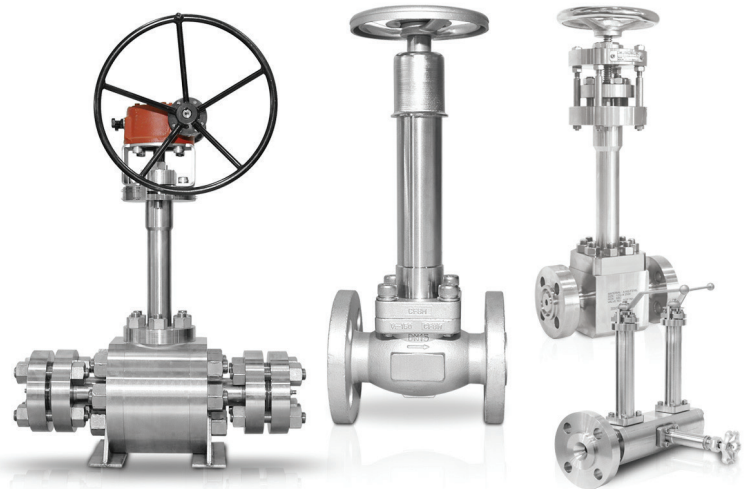

| Liquefied Gases | Boiling Point | | Liquefied Gases | Boiling Point | |
|----------------------|---------------|-------|-----------------|---------------|------|
| | °C | °F | | °C | °F |
| Ammonia (NH3) | -33.4 | -28.1 | Oxygen (O2) | -183.3 | -298 |
| Propane (C3H8) | -42.2 | -44.0 | Argon (Ar) | -186.1 | -303 |
| Carbon Dioxide (CO2) | -78.5 | -109 | Air | -194.4 | -318 |
| Acetylene (C2H2) | -83.9 | -119 | Nitrogen (N2) | -195.6 | -320 |
| Ethylene (C2H4) | -103.9 | -155 | Neon (Ne) | -246.1 | -411 |
| Methane (CH4) | -161.7 | -259 | Hydrogen (H2) | -252.8 | -423 |
| Natural Gas (LNG) | -167.8 | -270 | Helium (He) | -268.9 | -452 |

Common Steel will show low temperature brittleness under low temperature.

Therefore, it is a key for design and manufacturing to select suitable body materials according to the lowest working temperature of the cryogenic valve. Refer to the following table for the lowest working temperature of body materials.

The low temperature materials shall be subjected to low temperature impact test according to standard requirements.

For valves with working temperature lower than -100°C, the body, bonnet and stem must be subjected to cryogenic treatment after tough machining.

The ball and seat sealing face should be subjected to cryogenic treatment hard alloy spray welding/overlay welding.


Then grinding and assembly can be carried out, so as to ensure the adaptability of materials under low temperature.

In addition, the packing, gasket, bolt and nut shall be made of materials suitable for low temperature service condition.

| Forging | | Casting | |
|-----------------|---------------------|----------------|---------------------|
| Material | Minimum Temperature | Material | Minimum Temperature |
| ASTM A350 LF2 | -46°C | ASTM A352 LCB | -46°C |
| | | ASTM A352 LCC | -46°C |
| ASTM A350 LF5 | -59°C | ASTM A352 LC1 | -59°C |
| ASTM A350 LF9 | -73°C | ASTM A352 LC2 | -73°C |
| ASTM A350 LF3 | -101°C | ASTM A352 LC3 | -101°C |
| ASTM A182 F304 | -254°C | ASTM A351 CF8 | -254°C |
| ASTM A182 F316 | -254°C | ASTM A351 CF8M | -254°C |
| ASTM A182 F304L | -254°C | ASTM A351 CF3 | -254°C |
| ASTM A182 F316L | -254°C | ASTM A351 CF3M | -254°C |

Cryogenic Testing

To maintain and enhance the reliability, quality, and functionality of the valves, BMT operates stringent cryogenic testing through the in-house facility. The tests include leakage, torques, and cycling under typical cryogenic conditions. Tests are carried out to recognized international standards such as BS 6364 and ISO 28921 or can be designed to customers specific requirements.

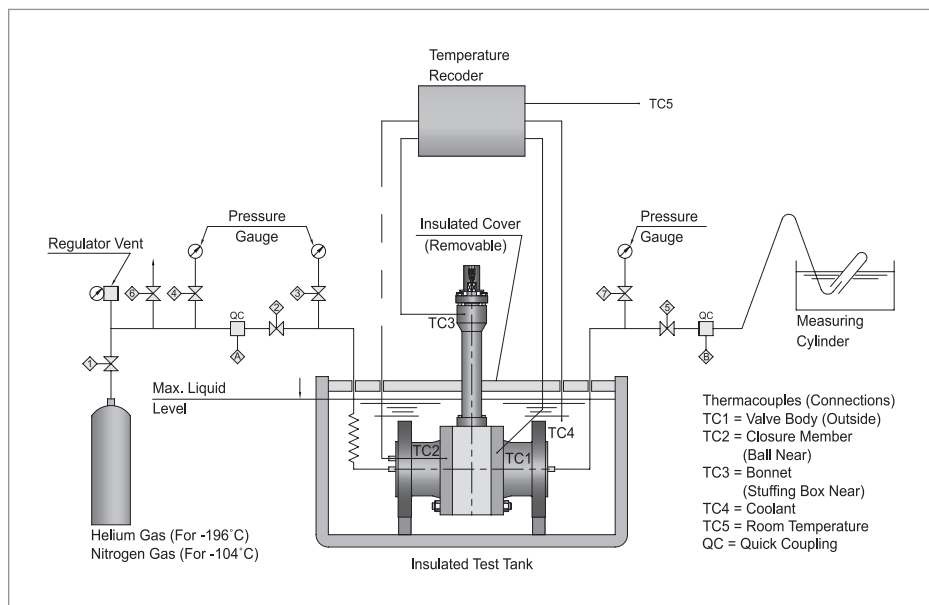

Test Procedure (Standard)

- 1. Initial Proving test:**
 Pressure: 1.1 x MDP @ R.T
 Test Fluid: Helium
- 2. Operating test with Torque measurement:**
 Open + Close: 20 Cycle
 Torque measurement: at 1st and 20th cycle
- 3. Seat Closure Leak test:**
 Pressure: 1.1 x MDP @ -196°C
 Test Fluid: Helium
- 4. Shell Leak test:**
 Pressure: 1.1 x MDP @ -196°C
 Test Fluid: Helium
 Duration: 15 mins
- 5. R.T Restoration test:**
 Pressure: 1.1 x MDP @ R.T
 Test Fluid: Helium

Construction - Ball and DBB Valves

Extended bonnets

Gland packing is located away from cold area in cryogenic and low temperature systems. Extended stems allow operation through bulkheads and other obstacles.

Cavity pressure relief

In case of an unusually high increase of operating or ambient temperature, liquefied gas or highly volatile liquid trapped within the body cavity may evaporate and cause an excess rise in the cavity pressure. To relieve cavity pressure, the following safety options (or combinations) are available:

- A small relief hole in the ball of the upstream port, which allows the cavity pressure to relieve to the upstream side making the valve unidirectional.
- A hole that is fitted with a relief valve for bidirectional operation.
- Self-relieving seats to relieve the excess of pressure inside the cavity of the valve (for bidirectional flow).

Locking devices

On manual valves, bolted plates allow all ball valves to be padlocked in the fully open or closed position. On valves with gearboxes, the locking devices are part of the gear. Interlocking systems ensure correct sequencing of any number and combination valves.

Actuated operation

Electric, pneumatic or hydraulic actuators. Actuated valve packages are functionally tested.

Seat / Sealing materials

From soft materials suitable for temperature down to -196°C (-321°F) to metal seats for aggressive and corrosive process media up to 500°C (932°F) constant temperature.

Construction - Globe, Gate and Needle Valves

Seat / Sealing materials

From soft materials suitable for temperature down to -196°C (-321°F) to metal seats for aggressive and corrosive media up to 850°C (1562°F) constant temperature.

Extended bonnets

Gland packing is located away from cold area in cryogenic and low temperature systems. Extended stems allow operation through bulkheads and other obstacles.

Cavity pressure Relief

Not needed

Locking devices

A locking device allows all Globe Valves to be padlocked in the fully open or closed position.

Actuated operation

Electric, pneumatic or hydraulic actuators. Actuated valve packages are functionally tested.

Construction – Swing Check and Lift Check Valves.


Seat / Sealing materials

Metal-seat structure, with sealing surface subject to hard-alloy weld overlay, which performs well in scouring & particle resistance and improves service life.

Ball Valves

Specifications


- Valve size : Top entry - 1/2" to 14"
2&3-piece ball valves - 1/2" to 14"
- Pressure class : ASME class 150 to class 2500
- End connection : Butt weld, socket weld, threaded, flanged or combinations
- Temperature : Down to -196°C
- Bolted extension bonnet
- Anti blow out proof stem
- Fire safety design
- Wall thickness design : ASME B16.34
- Inspection and test : BS6364, API 598, ISO28921
- End flange dimension : ASME B16.5
- Butt weld end dimension : ASME B16.25
- Socket weld end dimension : ASME B 16.11
- Face to face & end to end : ASME B16.10

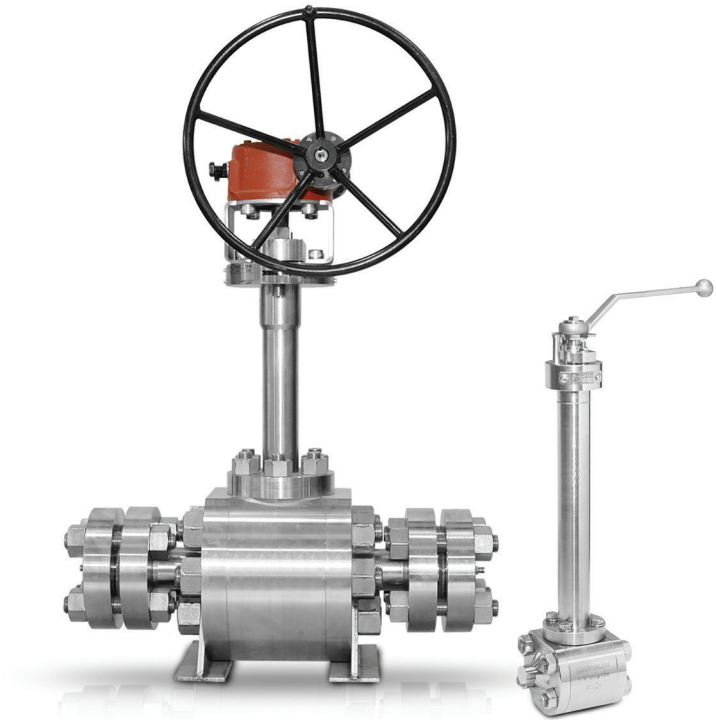

Block & Bleed Valves


Specifications

- Valve size : 1/2" to 4"
- Pressure class : ASME class 150 to class 2500
- Valve type : Ball-ball-needle, needle-needle-needle
- Bore size : Full bore, reduced bore
- End connection : Flanged-threaded, flanged-flanged
- Temperature : Down to -196°C
- Floating & trunnion ball design
- Bolted extension bonnet
- Anti blow out proof stem
- Fire safety design
- Wall thickness design : ASME B16.34
- Inspection and test : BS 6364, API 598, ISO28921
- End flange dimension : ASME B 16.5
- Face to face & end to end : Manufacture standard

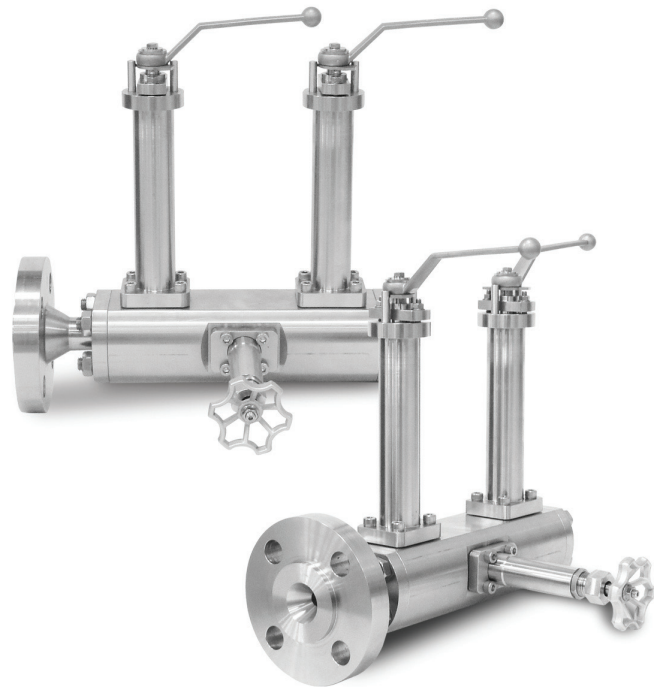

- Components can limit the pressure and temperature ranges of the valve. Please consult BMT (SUPERLOK) sales representative for your specific application.

Top Entry Ball Valves

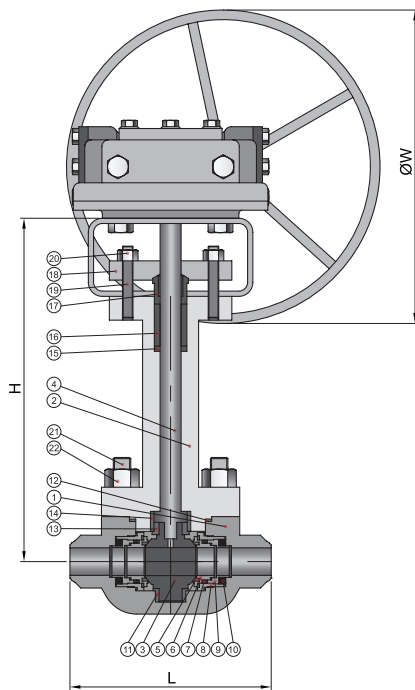

Materials of Construction

| NO. | COMPONENT | MATERIAL |
|-----|----------------------|-------------------|
| 1 | BODY | ASTM A351-CF8M |
| 2 | BONNET | ASTM A351-CF8M |
| 3 | BALL | ASTM A351-CF8M |
| 4 | STEM | ASTM A276-316 |
| 5 | SEAT | PCTFE |
| 6 | SEAT RETAINER | ASTM A276-316 |
| 7 | U-CUP SEAL | VIRGIN PTFE+SS316 |
| 8 | SEAT HOLDER | ASTM A276-316 |
| 9 | BACK UP SEAT RING | ASTM A276-316 |
| 10 | SPRING | INCONEL X-750 |
| 11 | BOTTOM THRUST WASHER | PCTFE |
| 12 | GASKET | GRAPHITE+SS316 |
| 13 | UPPER THRUST WASHER | PCTFE |
| 14 | TURUST BEARING | PCTFE |
| 15 | STEM WASHER | ASTM A276-316 |
| 16 | PACKING | GRAPHITE |
| 17 | GLAND | ASTM A276-316 |
| 18 | GLAND FLANGE | ASTM A276-316 |
| 19 | FLANGE BOLT | ASTM A320-B8 |
| 20 | FLANGE BOLT NUT | ASTM A194-8 |
| 21 | BONNET BOLT | ASTM A320-B8 |
| 22 | BONNET BOLT NUT | ASTM A194-8 |

Table of Dimensions

Class 150

| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|------|-----|------------|------|
| DN | NPS | L | | H | W | BW | FLG |
| | | BW | FLG | | | | |
| 15 | 1/2 | 108 | 108 | 300 | 190 | 4.3 | 5.2 |
| 20 | 3/4 | 117 | 117 | 300 | 190 | 5.7 | 7.1 |
| 25 | 1 | 127 | 127 | 352 | 230 | 8.6 | 10.4 |
| 40 | 1-1/2 | 165 | 165 | 400 | 300 | 12.9 | 16 |
| 50 | 2 | 178 | 178 | 434 | 350 | 15 | 20 |
| 65 | 2-1/2 | 190 | 190 | 550 | 350 | 20 | 23 |
| 80 | 3 | 203 | 203 | 561 | 350 | 36 | 45 |
| 100 | 4 | 229 | 229 | 600 | 350 | 61 | 73 |
| 150 | 6 | 394 | 394 | 1073 | 350 | 213 | 249 |

Class 300

| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|------|-----|------------|------|
| DN | NPS | L | | H | W | BW | FLG |
| | | BW | FLG | | | | |
| 15 | 1/2 | 140 | 140 | 300 | 190 | 4.3 | 5.5 |
| 20 | 3/4 | 152 | 152 | 300 | 190 | 5.7 | 8.2 |
| 25 | 1 | 165 | 165 | 352 | 230 | 8.6 | 11.6 |
| 40 | 1-1/2 | 190 | 190 | 400 | 450 | 12.9 | 15.9 |
| 50 | 2 | 216 | 216 | 434 | 450 | 16 | 22 |
| 65 | 2-1/2 | 241 | 241 | 550 | 450 | 25 | 31 |
| 80 | 3 | 283 | 283 | 560 | 450 | 43 | 54 |
| 100 | 4 | 305 | 305 | 612 | 450 | 80 | 100 |
| 150 | 6 | 403 | 403 | 1073 | 450 | 227 | 272 |

Class 600


| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|------|-----|------------|------|
| DN | NPS | L | | H | W | BW | FLG |
| | | BW | FLG | | | | |
| 15 | 1/2 | 165 | 165 | 300 | 230 | 6 | 7.8 |
| 20 | 3/4 | 191 | 191 | 300 | 230 | 6 | 9 |
| 25 | 1 | 216 | 216 | 352 | 450 | 12 | 15.7 |
| 40 | 1-1/2 | 241 | 241 | 400 | 450 | 25 | 32.1 |
| 50 | 2 | 292 | 292 | 434 | 450 | 43 | 54 |
| 65 | 2-1/2 | 330 | 330 | 550 | 450 | 55 | 62 |
| 80 | 3 | 356 | 356 | 600 | 450 | 66 | 82 |
| 100 | 4 | 432 | 432 | 710 | 450 | 102 | 145 |
| 150 | 6 | 559 | 559 | 1163 | 450 | 254 | 318 |

· Dimensions and Drawings are for reference only and are subject to change without prior notice.

· Unless otherwise specified, all dimensions are in millimeters.

· Sizes, pressure classes, and end connections not listed are available upon request.

2&3-Piece Ball Valves

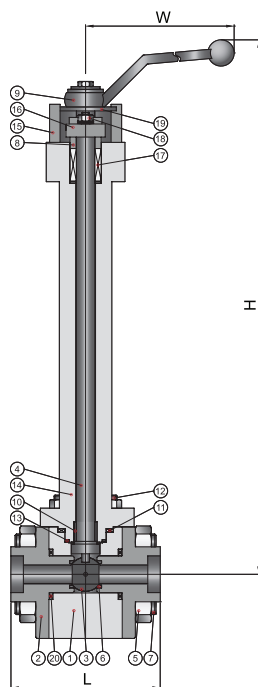

Material of Construction

| NO. | COMPONENT | MATERIAL |
|-----|-------------------|---------------------|
| 1 | BODY | ASTM A182-F316 |
| 2 | BODY CAP | ASTM A182-F316 |
| 3 | BALL | ASTM A276-316 |
| 4 | STEM | ASTM A276-316 |
| 5 | BODY BOLT NUT | ASTM A194-8 |
| 6 | BALL SEAT | PCTFE |
| 7 | BODY BOLT | ASTM A320-B8 |
| 8 | PACKING GLAND | ASTM A276-316 |
| 9 | BAR HANDLE | A351 CF8M |
| 10 | BUSHING | PCTFE |
| 11 | GASKET | GRAPHITE |
| 12 | BONNET BOLT / NUT | ASTM A320-B8/A194-8 |
| 13 | BONNET SEAL | PCTFE |
| 14 | BONNET | ASTM A182-F316 |
| 15 | STOP PIN | SS 316 |
| 16 | BONNET FLANGE | ASTM A276-316 |
| 17 | PACKING | GRAPHITE |
| 18 | STUD BOLT / NUT | ASTM A320-B8/A194-8 |
| 19 | LOCKING DEVICE | SS 316 |
| 20 | GASKET | GRAPHITE |

Table of Dimensions

Class 150, 300

| Size | | Dimensions | | | Weight kg |
|------|-------|------------|-----|------|-----------|
| DN | NPS | L SW | H | W | |
| 15 | 1/2 | 107 | 313 | 190 | 3.7 |
| 20 | 3/4 | 107 | 313 | 190 | 3.7 |
| 25 | 1 | 125 | 326 | 230 | 5.2 |
| 32 | 1-1/4 | 150 | 349 | 260 | 10.3 |
| 40 | 1-1/2 | 150 | 349 | 260 | 10.3 |
| 50 | 2 | 180 | 370 | 260 | 17.1 |
| 65 | 2.5 | 190 | 477 | 380 | 22 |
| 80 | 3 | 203 | 487 | 380 | 41 |
| 100 | 4 | 229 | 534 | 450 | 72 |
| 150 | 6 | 394 | 657 | *400 | 158 |
| 200 | 8 | 457 | 723 | *400 | 245 |
| 250 | 10 | 533 | 835 | *400 | 343 |
| 300 | 12 | 610 | 897 | *500 | 595 |
| 350 | 14 | 686 | 996 | *560 | 720 |

*Gear Operated

Class 600

| Size | | Dimensions | | | Weight kg |
|------|-------|------------|-----|-----|-----------|
| DN | NPS | L SW | H | W | |
| 15 | 1/2 | 107 | 313 | 190 | 3.7 |
| 20 | 3/4 | 107 | 313 | 190 | 3.7 |
| 25 | 1 | 125 | 326 | 230 | 5.2 |
| 32 | 1-1/4 | 150 | 349 | 260 | 10.3 |
| 40 | 1-1/2 | 150 | 349 | 260 | 10.3 |
| 50 | 2 | 180 | 370 | 260 | 17.1 |

Class 900

| Size | | Dimensions | | | Weight kg |
|------|-------|------------|-----|-----|-----------|
| DN | NPS | L SW | H | W | |
| 15 | 1/2 | 167 | 326 | 230 | 7.3 |
| 20 | 3/4 | 167 | 326 | 230 | 7.3 |
| 25 | 1 | 185 | 342 | 230 | 10.6 |
| 32 | 1-1/4 | 210 | 360 | 260 | 19.1 |
| 40 | 1-1/2 | 210 | 360 | 260 | 19.1 |

Class 1500

| Size | | Dimensions | | | Weight kg |
|------|-------|------------|-----|-----|-----------|
| DN | NPS | L SW | H | W | |
| 15 | 1/2 | 167 | 326 | 230 | 7.3 |
| 20 | 3/4 | 167 | 326 | 230 | 7.3 |
| 25 | 1 | 185 | 342 | 230 | 10.6 |
| 32 | 1-1/4 | 210 | 360 | 260 | 19.1 |
| 40 | 1-1/2 | 210 | 360 | 260 | 19.1 |

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.

Globe Valves

Specifications

- Valve size : 1/2" to 14"
- Pressure class : ASME class 150 to class 2500
- End connection : Butt weld, socket weld, threaded, flanged or combinations
- Temperature : -196°C to 850°C (-321°F to 1562°F)
- Standard inclusion of a back seat facility for ease of maintenance.
- Bolted extension bonnet
- Inside or outside screw stem & fire safety design
- Non rotating and self aligning stem disc construction
- Metal seat to bubble tight shut-off design
- Wall thickness design : ASME B16.34
- Inspection and test : BS6364, API 598, ISO28921
- End flange dimension : ASME B16.5
- Butt weld end dimension : ASME B16.25
- Face to face & end to end : ASME B16.10

Gate Valves

Specifications

- Valve size : 1/2" to 24"
- Pressure class : ASME class 150 to class 2500
- End connection : Butt weld(ASME B16.20), flanged(ASME B16.5)
- Temperature range : -196°C to 120°C (-321 to 248°F)
- Standard inclusion of a back seat factory for ease of maintenance
- Bolted extension bonnet, fire safety design
- Inspection and test: BS6364, API 598
- Design : API 600
- Face to face : ASME B16.10

Needle Valves


Specifications

- Valve size : 1/2" to 1-1/2"
- Pressure class : ASME class 150
- End connection : Butt weld, socket weld, threaded, flanged or combinations
- Temperature : -196 to 371°C (-321 to 700°F)
- Bolted extension bonnet
- Non rotating and self aligning stem disc construction
- Metal seat to bubble tight shut-off design
- Position indicator
- Fire-safety design
- Wall thickness design : ASME B16.34
- Inspection and test : BS6364, API 598, ISO28921
- End flange dimension : ASME B16.5
- Butt weld end dimension : ASME B16.25
- Face to face & end to end : Manufacturer's standard



- Components can limit the pressure and temperature ranges of the valve. Please consult BMT (SUPERLOK) sales representative for your specific application.

Globe Valves (forged)

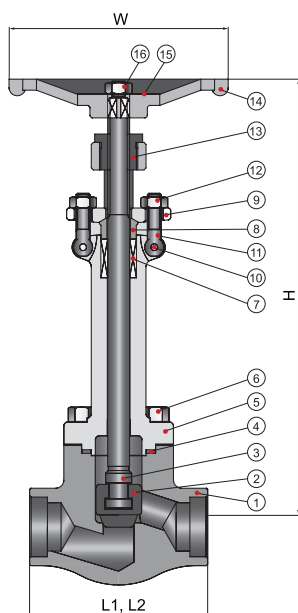

Materials of Construction

| NO. | COMPONENT | MATERIAL |
|-----|---------------|----------------|
| 1 | BODY | ASTM A182-F316 |
| 2 | DISC | ASTM A276-316 |
| 3 | STEM | ASTM A276-316 |
| 4 | GASKET | GRAPHITE |
| 5 | BONNET | ASTM A182-F316 |
| 6 | BONNET BOLT | A320-B8 |
| 7 | GLAND PACKING | GRAPHITE |
| 8 | GLAND | ASTM A276-316 |
| 9 | GLAND FLANGE | ASTM A182-F316 |
| 10 | EYE BOLT PIN | ASTM A276-304 |
| 11 | EYE BOLT | A320-B8 |
| 12 | EYE BOLT NUT | A194-8 |
| 13 | SLEEVE | ASTM A276-316 |
| 14 | HAND WHEEL | A351 CF8M |
| 15 | NAME PLATE | ALUMINIUM |
| 16 | WHEEL NUT | 316 SS |

Table of Dimensions

Class 150

| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|-----|-----|------------|------|
| DN | NPS | L | | H | W | Weight, kg | |
| | | SW | FLG | | | SW | FLG |
| 15 | 1/2 | 79 | 108 | 466 | 100 | 4.3 | 8.7 |
| 20 | 3/4 | 92 | 117 | 466 | 100 | 5.7 | 9.1 |
| 25 | 1 | 111 | 127 | 503 | 125 | 8.6 | 12.3 |
| 32 | 1-1/4 | 152 | 165 | 606 | 160 | 12.9 | 16.2 |
| 40 | 1-1/2 | 152 | 165 | 606 | 160 | 12.6 | - |
| 50 | 2 | 172 | 203 | 657 | 180 | 21.3 | 24.4 |

Class 300


| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|-----|-----|------------|------|
| DN | NPS | L | | H | W | Weight, kg | |
| | | SW | FLG | | | SW | FLG |
| 15 | 1/2 | 79 | 152 | 466 | 100 | 4.3 | 8.8 |
| 20 | 3/4 | 92 | 178 | 466 | 100 | 5.7 | 9.4 |
| 25 | 1 | 111 | 203 | 503 | 125 | 8.6 | 12.7 |
| 32 | 1-1/4 | 152 | 216 | 606 | 160 | 12.9 | 17.0 |
| 40 | 1-1/2 | 152 | 229 | 606 | 160 | 12.6 | 17.1 |
| 50 | 2 | 172 | 267 | 657 | 180 | 21.3 | 25.5 |

Class 600

| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|-----|-----|------------|------|
| DN | NPS | L | | H | W | Weight, kg | |
| | | SW | FLG | | | SW | FLG |
| 15 | 1/2 | 79 | 165 | 466 | 100 | 4.3 | 9.4 |
| 20 | 3/4 | 92 | 191 | 466 | 100 | 5.7 | 10.1 |
| 25 | 1 | 111 | 216 | 503 | 125 | 8.6 | 14.0 |
| 32 | 1-1/4 | 152 | 229 | 606 | 160 | 12.9 | 18.1 |
| 40 | 1-1/2 | 152 | 241 | 606 | 160 | 12.6 | 18.4 |
| 50 | 2 | 172 | 292 | 657 | 180 | 21.3 | 26.6 |

· Dimensions and Drawings are for reference only and are subject to change without prior notice.
 · Unless otherwise specified, all dimensions are in millimeters.
 · Sizes, pressure classes, and end connections not listed are available upon request.

Globe Valves

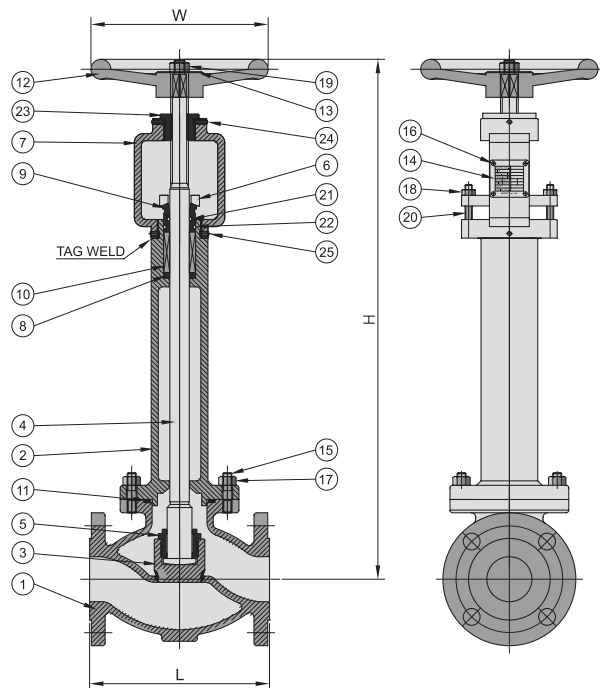

Materials of Construction

| NO. | COMPONENT | MATERIAL |
|-----|---------------------|-----------------|
| 1 | BODY | A351-CF8M |
| 2 | EXTENSION BONNET | A351-CF8M |
| 3 | DISC | A276-316 |
| 4 | EXTENSION STEM | A276-316 |
| 5 | DISC NUT | A276-316 |
| 6 | GLAND FLANGE | A240-304 |
| 7 | YOKE | A351-CF8M |
| 8 | STEM WASHER | A276-316 |
| 9 | PACKING GLAND | A276-316 |
| 10 | PACKING | GRAPHITE+WIRE |
| 11 | SPIRAL WOUND GASKET | GRAPHITE+316SS |
| 12 | HANDLE | FC20 |
| 13 | HANDLE NAMEPLATE | STAINLESS STEEL |
| 14 | NAMEPLATE | STAINLESS STEEL |
| 15 | BODY BOLT | A193-B8M-CL.2 |
| 16 | HEX SOCKET BOLT | 304 SS |
| 17 | HEAVY HEX NUT | A194-8M |
| 18 | HEX NUT | 304 SS |
| 19 | HEX NUT | 304 SS |
| 20 | PACKING BOLT | 304 SS |
| 21 | O-RING | NBR |
| 22 | O-RING | NBR |
| 23 | YOKE BUSHING | BRASS |
| 24 | SET SCREW | 304 SS |
| 25 | SET SCREW | 304 SS |

Table of Dimensions

Class 150

| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|------|-----|------------|---------|
| DN | NPS | L | | H | W | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | | |
| 65 | 2-1/2 | 216 | 229 | 660 | 200 | 27 | 32 |
| 80 | 3 | 241 | 254 | 690 | 200 | 37 | 42 |
| 100 | 4 | 292 | 305 | 750 | 300 | 50 | 55 |
| 125 | 5 | 356 | 368 | 850 | 300 | 50 | 55 |
| 150 | 6 | 406 | 419 | 975 | 300 | 81 | 86 |
| 200 | 8 | 495 | 508 | 1040 | 300 | 125 | 130 |
| 250 | 10 | 622 | 635 | 1200 | 400 | 175 | 180 |
| 300 | 12 | 698 | 711 | 1365 | 500 | 275 | 280 |
| 350 | 14 | 787 | 800 | 1940 | 800 | 365 | 380 |

Class 300


| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|-----|-----|------------|---------|
| DN | NPS | L | | H | W | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | | |
| 65 | 2-1/2 | 292 | 308 | 750 | 200 | 35 | 40 |
| 80 | 3 | 318 | 333 | 760 | 224 | 65 | 70 |
| 100 | 4 | 356 | 371 | 810 | 250 | 80 | 85 |
| 125 | 5 | 400 | 416 | 920 | 280 | 100 | 105 |
| 150 | 6 | 445 | 460 | 973 | 315 | 200 | 205 |

Class 600

| Size | | Dimensions | | | | Weight, kg | |
|------|-------|------------|-----|------|-----|------------|---------|
| DN | NPS | L | | H | W | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | | |
| 65 | 2-1/2 | 330 | 333 | 800 | 224 | 50 | 55 |
| 80 | 3 | 356 | 359 | 840 | 250 | 72 | 75 |
| 100 | 4 | 432 | 435 | 1010 | 315 | 127 | 132 |
| 150 | 6 | 559 | 562 | 1160 | 400 | 295 | 310 |

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.

Gate Valves

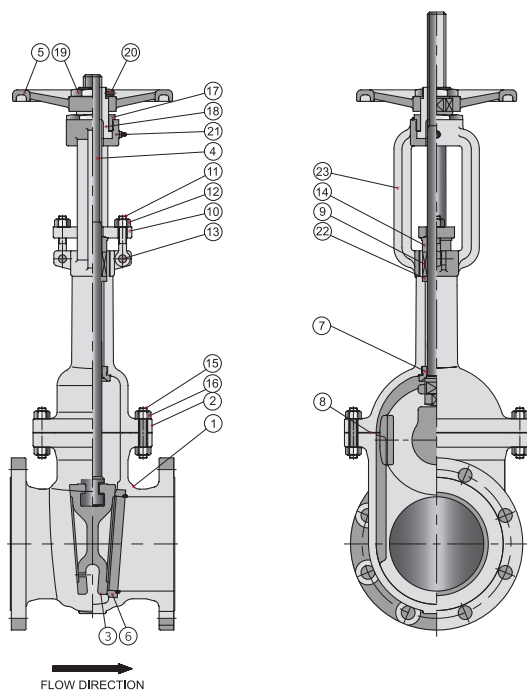

Materials of Construction

| NO. | COMPONENT | MATERIAL |
|-----|----------------------|----------------|
| 1 | BODY | A351-CF8M |
| 2 | BONNET | A351-CF8M |
| 3 | DISC | A351-CF8M |
| 4 | STEM | A276-316 |
| 5 | HANDWHEEL | FC20 |
| 6 | BODY SEAT RING | A276-316 |
| 7 | BACK SEAT RING | A276-316 |
| 8 | SPRICAL WOUND GASKET | 316SS+GRAPHITE |
| 9 | PACKING GRAPHITE | GRAPHITE |
| 10 | GLAND FLANGE | A240-304 |
| 11 | GLAND BOLT | A193-B8 |
| 12 | NUT | A194-8 |
| 13 | HINGE PIN | A479-304 |
| 14 | PACKING GLAND | A479-304 |
| 15 | BONNET BOLT | A193-B8M |
| 16 | NUT | A194-8M |
| 17 | YOKE NUT | A576-1020+Zn |
| 18 | STEM NUT | A439-D2C |
| 19 | HANDLE NUT | A576-1020+Zn |
| 20 | SET SCREW | STEEL |
| 21 | GREASE NIPPLE | STEEL+Zn |
| 22 | STUFFING RING | A479-316 |
| 23 | YOKE | A351-CF8M |

Table of Dimensions

Class 150


| Size | | Dimensions | | | | Weight, kg | |
|------|------|------------|-----|------|------|------------|---------|
| DN | NPS | L | | H | W | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | | |
| 50 | 2" | 178 | 191 | 597 | 200 | 19 | 21 |
| 65 | 2.5" | 190 | 203 | 672 | 200 | 26 | 29 |
| 80 | 3" | 203 | 216 | 707 | 250 | 34 | 38 |
| 100 | 4" | 229 | 242 | 816 | 250 | 51 | 56 |
| 150 | 6" | 267 | 280 | 999 | 315 | 85 | 92 |
| 200 | 8" | 292 | 305 | 1181 | 300 | 137 | 148 |
| 250 | 10" | 330 | 343 | 1426 | GEAR | 231 | 247 |
| 300 | 12" | 356 | 369 | 1576 | GEAR | 353 | 377 |
| 350 | 14" | 381 | 394 | 1875 | GEAR | 461 | 498 |
| 400 | 16" | 406 | 419 | 2159 | GEAR | 661 | 703 |
| 450 | 18" | 432 | 445 | 2564 | GEAR | 796 | 842 |
| 500 | 20" | 457 | 470 | 2872 | GEAR | 1011 | 1070 |

Class 300

| Size | | Dimensions | | | | Weight, kg | |
|------|------|------------|------|------|------|------------|---------|
| DN | NPS | L | | H | W | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | | |
| 50 | 2" | 216 | 232 | 625 | 200 | 26 | 29 |
| 65 | 2.5" | 241 | 257 | 706 | 200 | 35 | 39 |
| 80 | 3" | 282 | 298 | 725 | 250 | 47 | 53 |
| 100 | 4" | 305 | 321 | 836 | 250 | 68 | 77 |
| 150 | 6" | 403 | 419 | 1026 | 355 | 137 | 153 |
| 200 | 8" | 419 | 435 | 1213 | GEAR | 249 | 273 |
| 250 | 10" | 457 | 473 | 1429 | GEAR | 377 | 412 |
| 300 | 12" | 502 | 518 | 1667 | GEAR | 491 | 542 |
| 350 | 14" | 762 | 778 | 2080 | GEAR | 828 | 898 |
| 400 | 16" | 838 | 854 | 2305 | GEAR | 1066 | 1154 |
| 450 | 18" | 914 | 930 | 2617 | GEAR | 1467 | 1576 |
| 500 | 20" | 991 | 1010 | 2764 | GEAR | 1820 | 1953 |

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.

Needle Valves

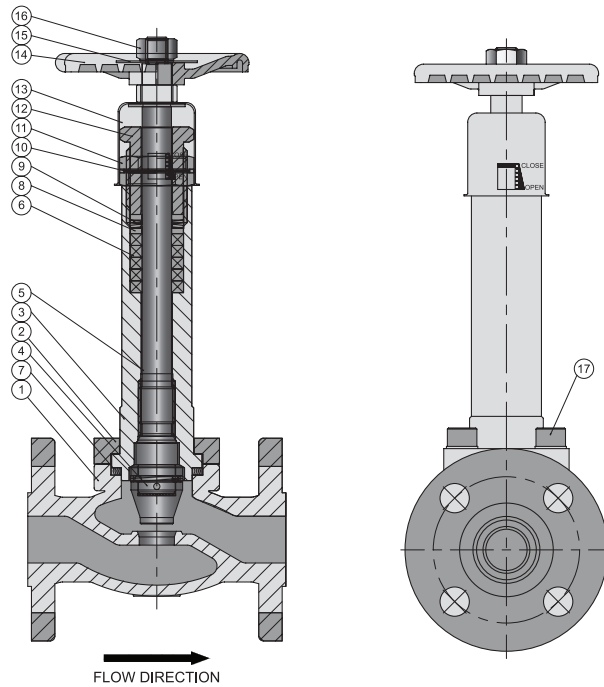

Materials of Construction

| NO. | COMPONENT | MATERIAL |
|-----|--------------------|---------------------|
| 1 | BODY | ASTM A351-CF8M |
| 2 | BONNET FLAGNE | ASTM A351-CF8M |
| 3 | EXTENSION BONNET | ASTM A276-316 |
| 4 | ROTATING DISC | ASTM A276-316 |
| 5 | STEM | ASTM A276-316 |
| 6 | PACKING | GRAPHITE |
| 7 | GASKET | GRAPHITE/316SS |
| 8 | PACKING GLAND | SS316 |
| 9 | DISC SPRING | SS316 |
| 10 | POSITION INDICATOR | PC |
| 11 | LOCK NUT | SS316 |
| 12 | PACKING BOLT | SS316 |
| 13 | VALVE CAP | SS316 |
| 14 | HAND WHEEL | ASTM A351 CF8M |
| 15 | NAME PLATE | SS316L |
| 16 | HEX NUT | SS316 |
| 17 | HEX SOCKET BOLT | A320 B8M CL.2 |
| 18 | TAG PLATE | SS316 |
| 19 | GASKET | GRAPHITE / HOOP:316 |
| 20 | HEX NUT | A194-8M |
| 21 | STUD BOLT | A320 B8M CL.2 |
| 22 | FLANGE ADAPTOR | A182-F316 |
| 23 | EARTH WIRE | SS316 |

Table of Dimensions

Class 150

| Size | | Dimensions | | | | Weight, kg | |
|------|------|------------|-----|-----|-----|------------|---------|
| DN | NPS | L | | H | W | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | | |
| 15 | 1/2" | 114 | 114 | 239 | 90 | 2.5 | 3.0 |
| 20 | 3/4" | 114 | 114 | 239 | 90 | 3.0 | 3.5 |
| 25 | 1" | 140 | 153 | 272 | 100 | 4.5 | 5.0 |

Class 300

| Size | | Dimensions | | | | Weight, kg | |
|------|------|------------|-----|-----|-----|------------|---------|
| DN | NPS | L | | H | W | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | | |
| 15 | 1/2" | 152 | 163 | 299 | 90 | 3.2 | 4.0 |
| 20 | 3/4" | 178 | 191 | 299 | 90 | 3.7 | 4.5 |
| 25 | 1" | 203 | 216 | 335 | 100 | 5.7 | 6.7 |

- Dimensions and Drawings are for reference only and are subject to change without prior notice.
- Unless otherwise specified, all dimensions are in millimeters.
- Sizes, pressure classes, and end connections not listed are available upon request.

Swing Check Valves


Specifications

- Valve size : 1-1/2" to 20"
- Pressure class : ASME class 150 to class 2500
- End connection : Butt weld(ASME B16.20), langed(ASME B16.5)
- Temperature range : -196°C to 120°C (-321 to 248°F)
- Metal seat to bubble tight shut-off design
- Inspection and test: BS6364, API598
- Design : BS 1868
- Face to face : ASME B16.10

Lift Check Valves


Specifications

- Valve size : 1/2" to 20"
- Pressure class : ASME class 150 to class 2500
- End connection : Butt weld(ASME B16.20), flanged(ASME B16.5)
- Temperature range : -196°C to 120°C (-321 to 248°F)
- Metal seat to bubble tight shut-off design
- Inspection and test: BS6364, API598
- Design : BS1873
- Face to face : ASME B16.10

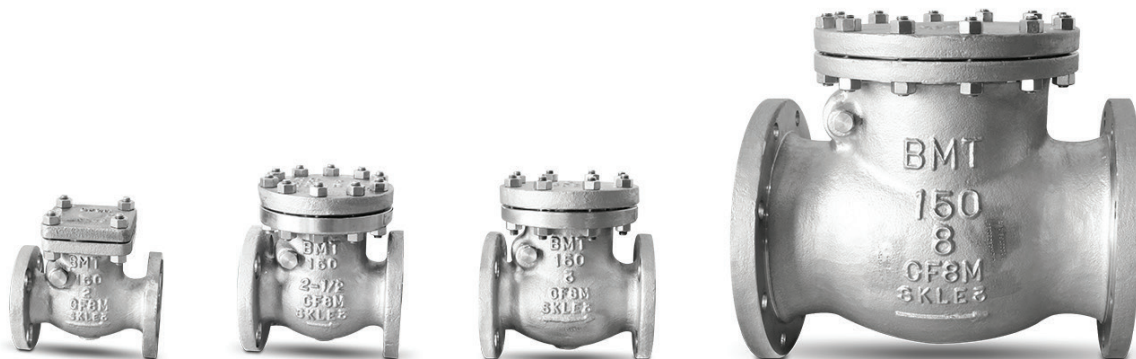

- Components can limit the pressure and temperature ranges of the valve. Please consult BMT (SUPERLOK) sales representative for your specific application.

Swing Check Valves

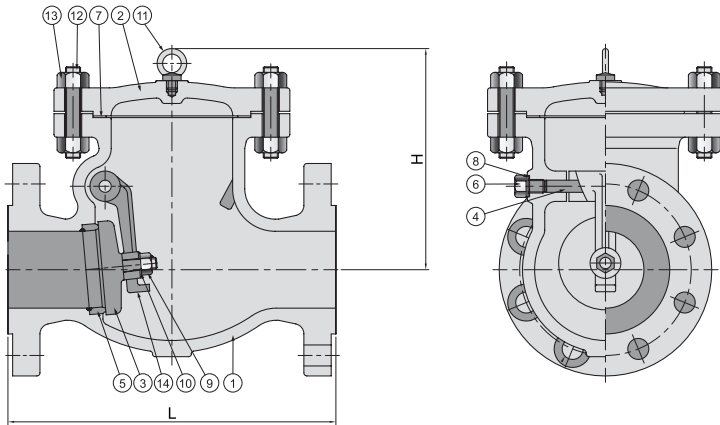

| NO. | COMPONENT | MATERIAL |
|-----|---------------|-----------------|
| 1 | BODY | A351-CF8M |
| 2 | BONNET | A351-CF8M |
| 3 | DISC | SS316 |
| 4 | HINGE PIN | SS316 |
| 5 | SEAT RING | SS316 |
| 6 | PLUG | SS316 |
| 7 | BONNET GASKET | SPW316+GRAPHITE |
| 8 | PLUG GASKET | SS316 |
| 9 | DISC NUT | A194-8M |
| 10 | WASHER | SS316 |
| 11 | EYE BOLT | SS304 |
| 12 | BONNET BOLT | A193-B8M |
| 13 | NUT | A194-8M |
| 14 | ARM | A351-CF8M |

Table of Dimensions


Class 150

| Size | | Dimensions | | | Weight, kg | |
|------|------|------------|-----|-----|------------|---------|
| DN | NPS | L | | H | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | |
| 50 | 2" | 203 | 216 | 147 | 14 | 16 |
| 65 | 2.5" | 216 | 229 | 163 | 20 | 23 |
| 80 | 3" | 241 | 254 | 176 | 22 | 26 |
| 100 | 4" | 292 | 305 | 204 | 40 | 45 |
| 150 | 6" | 356 | 369 | 290 | 71 | 78 |
| 200 | 8" | 495 | 508 | 350 | 125 | 136 |
| 250 | 10" | 622 | 635 | 428 | 198 | 214 |
| 300 | 12" | 698 | 711 | 499 | 297 | 321 |
| 350 | 14" | 787 | 800 | 606 | 373 | 410 |
| 400 | 16" | 864 | 877 | 650 | 472 | 514 |
| 450 | 18" | 978 | 991 | 781 | 695 | 741 |
| 500 | 20" | 978 | 991 | 647 | 880 | 939 |

Class 300

| Size | | Dimensions | | | Weight, kg | |
|------|------|------------|------|-----|------------|---------|
| DN | NPS | L | | H | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | |
| 50 | 2" | 267 | 283 | 163 | 18 | 21 |
| 65 | 2.5" | 292 | 308 | 180 | 33 | 37 |
| 80 | 3" | 318 | 334 | 197 | 36 | 42 |
| 100 | 4" | 356 | 372 | 220 | 55 | 64 |
| 150 | 6" | 444 | 460 | 332 | 108 | 124 |
| 200 | 8" | 533 | 549 | 380 | 198 | 222 |
| 250 | 10" | 622 | 638 | 477 | 257 | 292 |
| 300 | 12" | 711 | 727 | 535 | 393 | 444 |
| 350 | 14" | 838 | 854 | 580 | 574 | 644 |
| 400 | 16" | 864 | 880 | 695 | 707 | 795 |
| 450 | 18" | 978 | 994 | 797 | 943 | 1052 |
| 500 | 20" | 1016 | 1035 | 852 | 1077 | 1210 |

Lift Check Valves

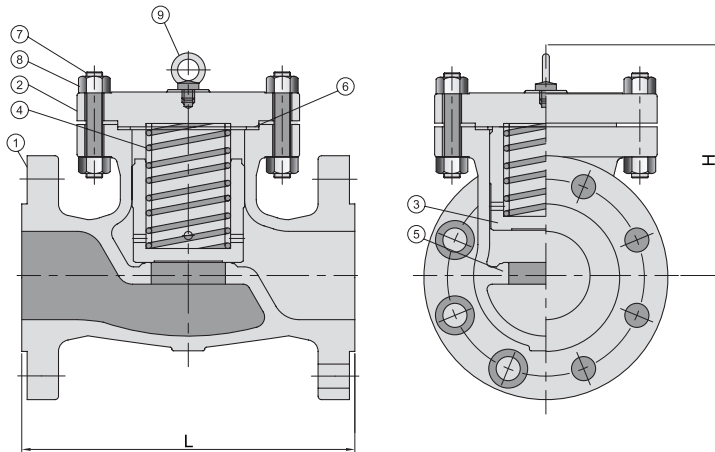

Materials of Construction


| NO. | COMPONENT | MATERIAL |
|-----|----------------|-----------------|
| 1 | BODY | A351-CF8M |
| 2 | BONNET | A351-CF8M |
| 3 | DISC | SS316 |
| 4 | LOADED SPRING | INCONEL X-750 |
| 5 | BODY SEAT RING | INTEGRAL |
| 6 | GASKET | SPW316+GRAPHITE |
| 7 | BONNET BOLT | A193-B8M |
| 8 | NUT | A194-8M |
| 9 | EYE BOLT | SS304 |

Table of Dimensions

Class 150

| Size | | Dimensions | | | Weight, kg | |
|------|------|------------|-----|-----|------------|---------|
| DN | NPS | L | | H | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | |
| 15 | 1/2" | 108 | 108 | 51 | 1.5 | 2 |
| 20 | 3/4" | 117 | 117 | 55 | 1.5 | 3 |
| 25 | 1" | 127 | 140 | 65 | 2.5 | 4 |
| 40 | 1.5" | 140 | 153 | 84 | 4.5 | 8 |
| 50 | 2" | 203 | 216 | 147 | 14 | 16 |
| 65 | 2.5" | 216 | 229 | 170 | 20 | 23 |
| 80 | 3" | 241 | 254 | 176 | 22 | 26 |
| 100 | 4" | 292 | 305 | 204 | 40 | 45 |
| 150 | 6" | 406 | 419 | 290 | 71 | 78 |
| 200 | 8" | 495 | 508 | 350 | 152 | 163 |
| 250 | 10" | 622 | 635 | 428 | 240 | 256 |
| 300 | 12" | 699 | 712 | 499 | 361 | 385 |
| 350 | 14" | 787 | 800 | 606 | 454 | 491 |
| 400 | 16" | 914 | 927 | 650 | 574 | 616 |
| 450 | 18" | 978 | 991 | 781 | 842 | 888 |
| 500 | 20" | 978 | 991 | 647 | 1066 | 1125 |

Lift Check Valves

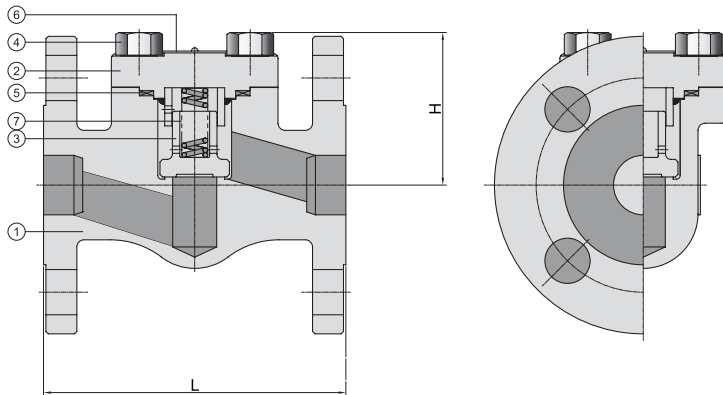

Materials of Construction

| NO. | COMPONENT | MATERIAL |
|-----|------------|----------------|
| 1 | BODY | A351-CF8M |
| 2 | Cover | A351-CF8M |
| 3 | Disc | SS316 |
| 4 | Cover Bolt | A193-B8M |
| 5 | Gasket | 316SS+GRAPHITE |
| 6 | Name Plate | Aluminum |
| 7 | Spring | SS316 |
| - | Seat | INTEGRAL |

Table of Dimensions

Class 300

| Size | | Dimensions | | | Weight, kg | |
|------|------|------------|------|-----|------------|---------|
| DN | NPS | L | | H | BW | FLG/RTJ |
| | | BW/FLG | RTJ | | | |
| 15 | 1/2" | 152 | 163 | 51 | 1.5 | 3 |
| 20 | 3/4" | 178 | 191 | 55 | 1.5 | 5 |
| 25 | 1" | 203 | 216 | 65 | 2.5 | 6 |
| 40 | 1.5" | 229 | 242 | 84 | 4.5 | 11 |
| 50 | 2" | 267 | 283 | 163 | 18 | 21 |
| 65 | 2.5" | 292 | 308 | 190 | 33 | 37 |
| 80 | 3" | 318 | 334 | 197 | 36 | 42 |
| 100 | 4" | 356 | 372 | 220 | 55 | 64 |
| 150 | 6" | 444 | 460 | 332 | 133 | 149 |
| 200 | 8" | 559 | 575 | 380 | 242 | 266 |
| 250 | 10" | 622 | 638 | 477 | 315 | 350 |
| 300 | 12" | 711 | 727 | 535 | 481 | 532 |
| 350 | 14" | 838 | 854 | 580 | 702 | 772 |
| 400 | 16" | 864 | 880 | 695 | 865 | 953 |
| 450 | 18" | 978 | 994 | 797 | 1152 | 1261 |
| 500 | 20" | 1016 | 1035 | 775 | 1317 | 1450 |

Ordering Information

| | | | | | | | | | | |
|-------------|-------------|----------|-----------|-----------|-----------|-----------|----------|-----------|----------|------------|
| Example 1 : | FGB3 | C | RF | 1 | - | 16 | - | G | | |
| | <u>1</u> | <u>3</u> | <u>4</u> | <u>5</u> | | <u>6</u> | | <u>7</u> | | |
| Example 2 : | FCGB | C | C | 8S | RF | 2 | - | 16 | - | 36L |
| | <u>1</u> | <u>2</u> | <u>3</u> | <u>4</u> | <u>4</u> | <u>5</u> | | <u>6</u> | | <u>8</u> |

1. Valve Type

| | | | |
|----------------------|----------|--------------------|--------|
| Ball Valves | Floating | 1-piece Top Entry | FCB1 |
| | | 1-piece Side Entry | FCB1S |
| | | 2-piece Side Entry | FCB2 |
| | | 3-piece Side Entry | FCB3 |
| | Trunnion | 1-piece Top Entry | FCBT1 |
| | | 1-piece Side Entry | FCBT1S |
| | | 2-piece Side Entry | FCBT2 |
| | | 3-piece Side Entry | FCBT3 |
| Globe Valves | | | FCGB |
| Gate Valves | | | FCGT |
| Needle Valves | | | FCNV |
| Block & Bleed Valves | | | (*) |
| Check Valves | Swing | | FCSC |
| | Lift | | FCLC |

(*) For Cryogenic Service, add the designator C at the front of the part number of Block & Bleed Valves.

2. Metal Forming Process

- (Blank)** = Forging
- C** = Casting

3. Pressure Rating

| | | | | | | | |
|------------|-----|-----|-----|-----|-----|------|------|
| Class | 150 | 300 | 600 | 800 | 900 | 1500 | 2500 |
| Designator | A | B | C | S | D | E | F |

4. End Connection

| | | | | | | |
|------------|-------------|----------|------------|------------|-----------|--------|
| Flange | Raised Face | | Ring Joint | | Flat Face | |
| Designator | RF | | RJ | | FF | |
| Butt Weld | Sch10S | Sch20S | Sch40S | Sch80S | Sch160 | SchXXS |
| Designator | 1S | 2S | 4S | 8S | 16 | DS |
| Type | Socket Weld | Male NPT | Male PT | Female NPT | Female PT | |
| Designator | SW | MN | MR | FN | FR | |

5. Bore

| | | | |
|------------|-----------|--------------|---------------------|
| Bore | Full Bore | Reduced Bore | Double Reduced Bore |
| Designator | 1 | 2 | 3 |

6. Size

| | | | | | | | | | | | | | | | | |
|------------|-----|-----|----|-------|-------|----|-------|----|----|----|----|-----|-----|-----|-----|-----|
| Size (in.) | 1/2 | 3/4 | 1 | 1-1/4 | 1-1/2 | 2 | 2-1/2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 |
| Designator | 8 | 12 | 16 | 20 | 24 | 32 | 40 | 48 | 64 | 80 | 96 | 128 | 160 | 192 | 224 | 256 |

7. Option

| | |
|------------|---------------|
| Option | Gear Actuator |
| Designator | G |

8. Material

| | | | | |
|------------|-----------------------|------------------------|----------------------|-----------------------|
| Material | A182-F316 / A351-CF8M | A182-F316L / A351-CF3M | A182-F304 / A351-CF8 | A182-F304L / A351-CF3 |
| Designator | (Blank) | 36L | 34 | 34L |

※ For special sizes and configurations, please consult BMT (SUPERLOK) sales representative.

BMT Co., Ltd.

Headquarters

(46031) 부산시 기장군 장안읍 신소재산단2로 17 (반룡리)

17, Sinsojaesandan 2-ro, Jangan-eup, Gijang-gun, Busan, 46031 South Korea

TEL: +82 51 780 5000 FAX: +82 51 780 5100

E-mail: superlok@superlok.com

WEB: www.superlok.com

Fittings & Valves

Industrial

Instrumentation Tube Fittings

i-Fitting®

Ball/Plug Valves

Double Block & Bleed Valves

Manifold/Gauge Valves

Globe/Needle Valves

Cryogenic Valves

Check/Relief/Excess Flow Valves

Medium/High Pressure Fittings & Valves

Eco-fuel Conversion and Supply Units

Ultra High Purity

HGS® (High-integrated Gas System)

Weld & Metal Face Seal Fittings

Bend Fittings

Diaphragm Valves

Bellows Valves

Check Valves

Clean Ball Valves

Regulators

Gas Filters

HGS® : Trademark registered in Republic of Korea (as of April 2024)

Electric & Energy

Metal Clad Switchgear (MCSG)

Compact Switchboard

Motor Control Center (MCC)

Smart Distribution Board

Energy Management System (EMS)