

Push-on Hose Fittings



Push-On Hose Fittings



Push-On Hose Assembly



1. Cut a clean, square edge on end of hose




2. Cover first barb of end connection with hose.
(Lubrication fitting stem with light oil may ease assembly)



3. Hold end connection against flat surface, Grip hose and push with a steady force until hose seats into blue finishing.

Push-On Hose Disassembly



1. Slit hose lengthwise from blue finishing cap to end of barb.
Do not damage barbs.



2. Bend hose to expose barbs, then remove hose with a quick pull.

Ordering Information

Example : **SPH 4 - 4S - SS**
1 2 3 4

(1) Push-On Hose Fitting Series

(2) Hose ID

HOSE IDENTIFY	1/4"	3/8"	1/2"	3/4"
	4	6	8	12

(3) End Connection

Fractional Tube	CONNECTION SIZE	1/4"	3/8"	1/2"	3/4"
	IDENTIFY	4S	6S	8S	12S

Tube Adapter	CONNECTION SIZE	1/4"	3/8"	1/2"	3/4"
	IDENTIFY	4T	6T	8T	12T


HOSE IDENTIFY	1/4"	3/8"	1/2"	3/4"
	4N(R)	6N(R)	8N(R)	12N(R)

(4) Material Designator

- SS : 316 Stainless steel
- B : BRASS

Push-On Hose Fittings


Superlok Tube Fittings

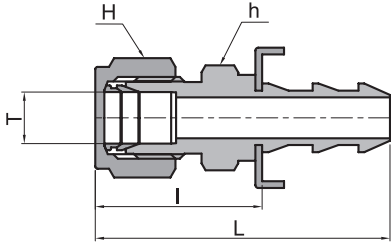

Part Number	Nominal Hose Size	T (Tube O.D)	Dimension (mm)			
			Hex		I	L
			H	h		
SPH4-4S	1/4	1/4	9/16	9/16	30.7	50.0
SPH6-6S	3/8	3/8	11/16	3/4	31.5	53.6
SPH8-8S	1/2	1/2	7/8	7/8	36.1	62.7

(Dimensions are for reference only and are subject change.)


Tube Adapters

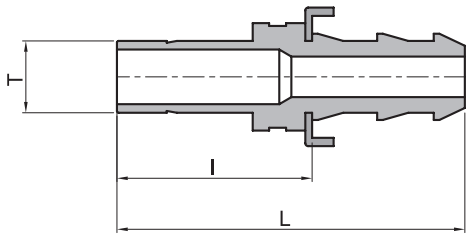

Part Number	Nominal Hose Size	T (Tube O.D)	Dimension (mm)	
			I	L
SPH4-4T	1/4	1/4	29.7	49.0
SPH6-6T	3/8	3/8	29.5	51.6
SPH8-8T	1/2	1/2	36.1	62.7
SPH12-12T	3/4	3/4	37.6	79.8

(Dimensions are for reference only and are subject change.)


Male Pipe Thread



Part Number	Nominal Hose Size	T Thread (NPT)	H (HEX)	Dimension (mm)	
				I	L
SPH4-4N	1/4	1/4	9/16	23.4	42.7
SPH6-4N	3/8	1/4	11/16	23.6	45.7
SPH6-6N	3/8	3/8	11/16	23.6	45.7
SPH8-8N	1/2	1/2	7/8	29.0	55.6
SPH12-12N	3/4	3/4	1 1/16	29.2	71.4

(Dimensions are for reference only and are subject change.)

Hose Straight Union

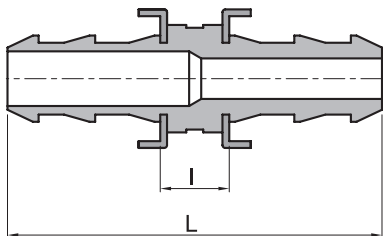

Part Number	Nominal Hose Size	Dimension (mm)	
		I	L
SPH4-4	1/4	14.0	52.6
SPH6-6	3/8	13.0	57.2
SPH8-8	1/2	13.0	69.4
SPH12-12	3/4	13.0	100.8

(Dimensions are for reference only and are subject change.)

BMT Co., Ltd.

Headquarters

(46031) 부산시 기장군 장안읍 신소재산단2로 17 (반룡리)

17, Sinsojaesandan 2-ro, Jangan-eup, Gijang-gun, Busan, 46031 South Korea

TEL: +82 51 780 5000 FAX: +82 51 780 5100

E-mail: superlok@superlok.com

WEB: www.superlok.com

Fittings & Valves

Industrial

Instrumentation Tube Fittings

i-Fitting®

Ball/Plug Valves

Double Block & Bleed Valves

Manifold/Gauge Valves

Globe/Needle Valves

Cryogenic Valves

Check/Relief/Excess Flow Valves

Medium/High Pressure Fittings & Valves

Eco-fuel Conversion and Supply Units

Ultra High Purity

HGS® (High-integrated Gas System)

Weld & Metal Face Seal Fittings

Bend Fittings

Diaphragm Valves

Bellows Valves

Check Valves

Clean Ball Valves

Regulators

Gas Filters

HGS® : Trademark registered in Republic of Korea (as of April 2024)

Electric & Energy

Metal Clad Switchgear (MCSG)

Compact Switchboard

Motor Control Center (MCC)

Smart Distribution Board

Energy Management System (EMS)